



5-1 One-touch Release

Connect the male connector at the end of the coiled wire attached to the saddle with the female connector attached to the key ball in the key box.

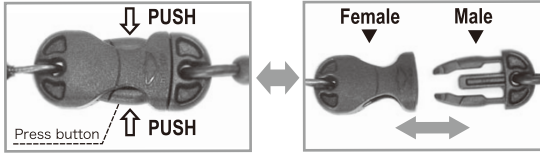

- CAUTION ⚠ 1. Hold the female connector and insert the male one. A clicking sound confirms that a connection has been made. Pull the male connector lightly to make sure that the connection has been made properly.
- CAUTION ⚠ 2. If you have difficulty making the connection, clean the male and female parts thoroughly.
- CAUTION ⚠ 3. Change it for a new one, if the insertion cannot be made properly. Insertion by force may cause a malfunction of the one-touch release.

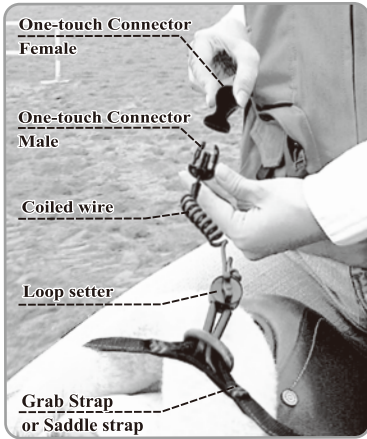

Buy an additional coiled wire/bungee lanyard for each additional saddle.

4-3 Key Box

○ Key Box

With a tensile strength of approximately 30kg-35kg by the "coiled wire", the "key ball" comes out of the "key box". Then a needle in the "key box" is activated and punctures the seal of the gas cartridge to inflate the Hit-Air instantly. The "key ball" can be pulled out from any direction (Photo 1).

WARNING ⚠ 1. Do not take the "key box" apart or remove any parts.

○ Red slide cover

Whenever using the Hit-Air, make sure the red slide cover is in the 'unlocked' (up) position. (Photo 2)

To re-assemble the key box, the red slide cover is to be used to confirm that the key ball is properly set in the hole of the key box. (Photo 3)

If the key ball is not set in the hole properly, the red slide cover will not come down.

WARNING ⚠ 1. When the red slide cover is in the 'locked' (down) position, the "key ball" cannot be released from the "key box", then the Hit-Air will not be activated. This may cause an injury to the rider in case of an accident. Whenever using the Hit-Air, make sure the red slide cover is in the 'unlocked' (up) position. (Photo 2)

CAUTION ⚠ 2. Even if the red slide cover is in the 'locked' position, if the wire is pulled strongly, the "key box" may activate the Hit-Air to inflate. The Hit-Air may also inflate accidentally when the red slide cover is moved from the 'locked' position to the 'unlocked' position after the wire is pulled strongly.

